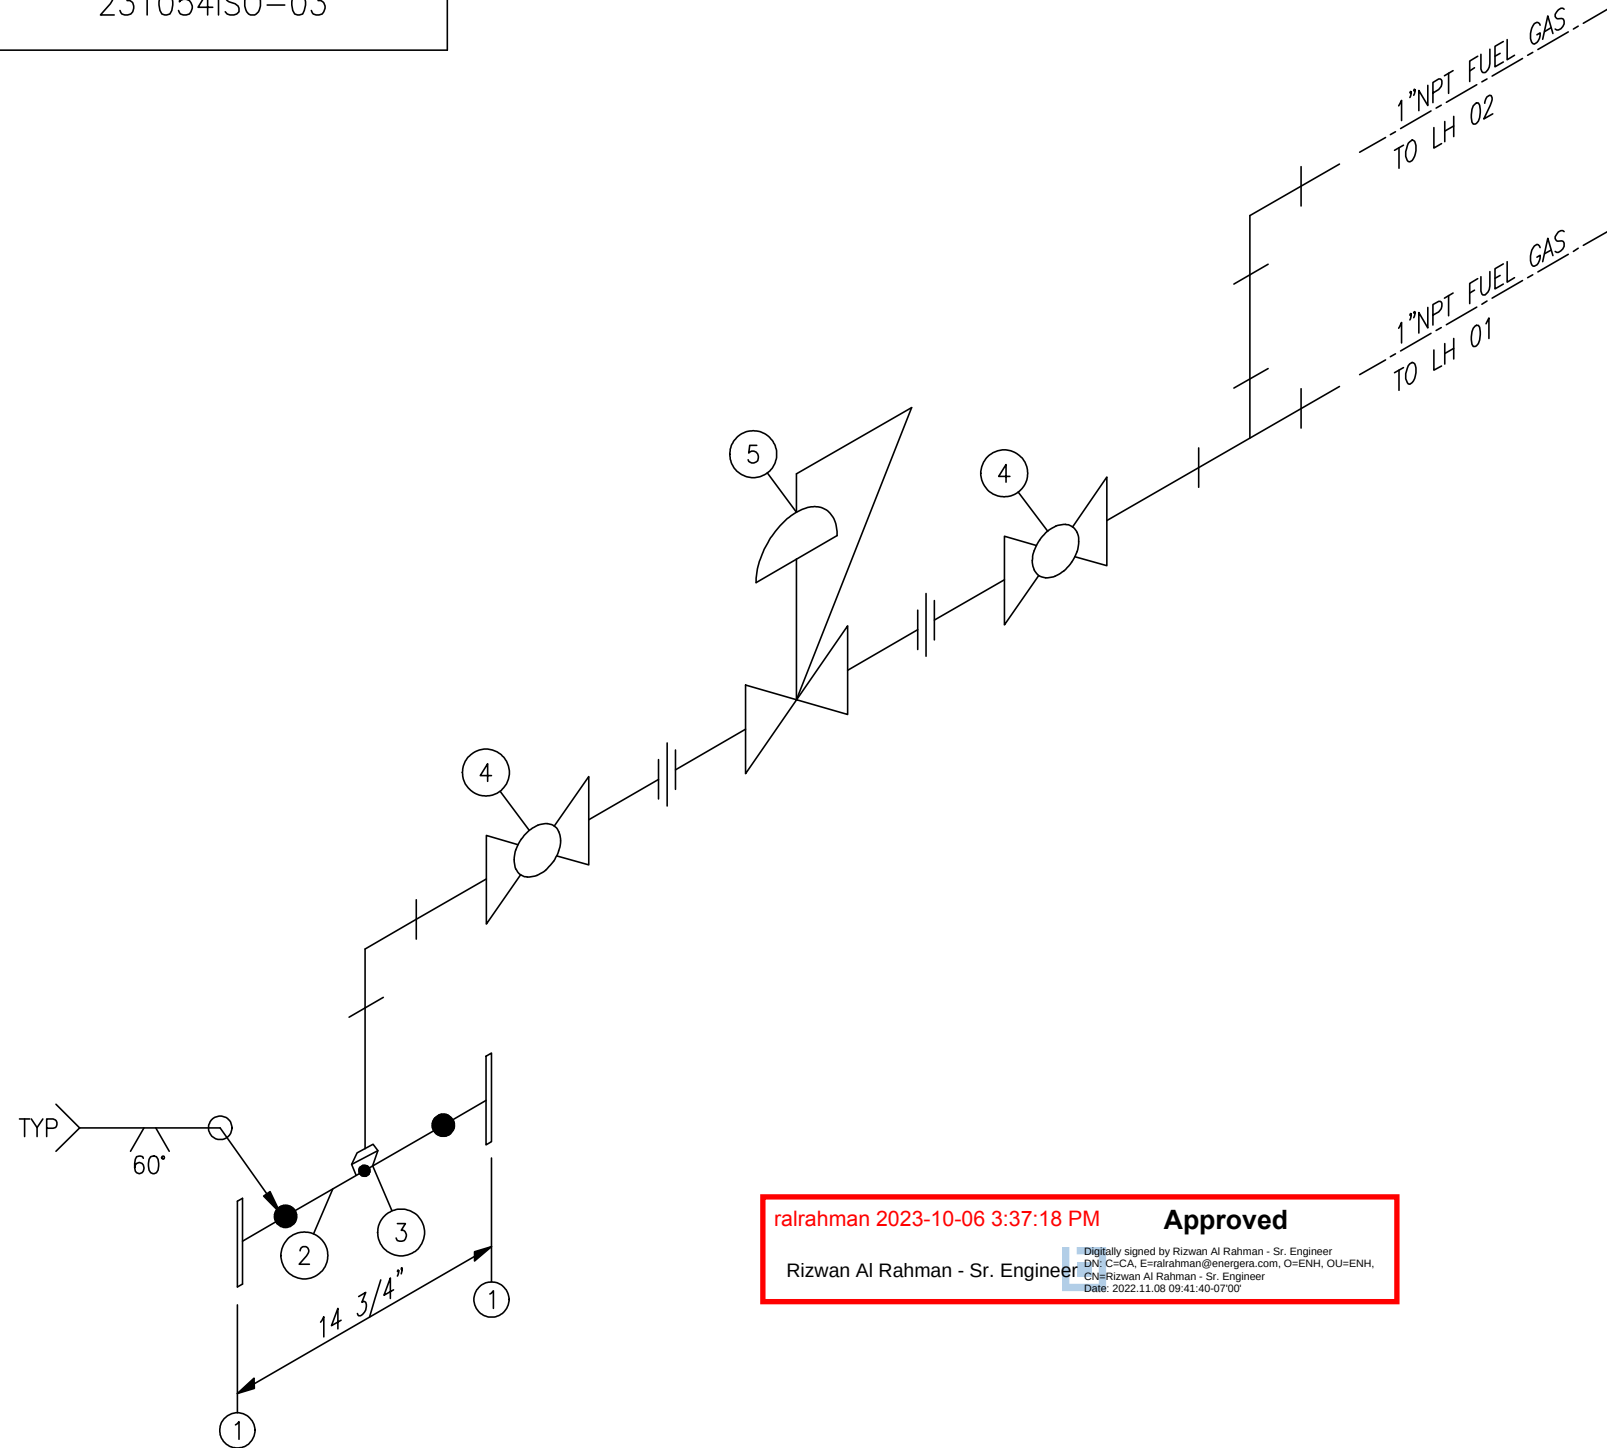


231054ISO-03

[illegible]

GENERAL NOTES:

1. TO BE BUILT IN ACCORDANCE WITH ASME PRESSURE PIPING CODE B31.3, 2022 EDITION.
2. IMPACT TEST EXEMPT AS PER TABLE 323.2.2A
3. MAX. W.P.: 655 PSIG @ 300°F (LIMITED BY FLANGE)
4. MDMT: -49°F
5. CORROSION ALLOWANCE: 0.0625"
6. HYDROTEST: 983PSIG
7. RADIOGRAPHY: 10%
8. PWHT: NONE
9. WELD PROCEDURE: 1/LT-8
10. ALL PIPE CUT LENGTHS INCLUDE 1/8" WELD GAPS.
11. COMMERCIAL SANDBLAST TO SSPC SP7.
12. PAINT: ONE COAT RED OXIDE PRIMER AND ONE COAT WARM GREY ENAMEL.
13. PLUG ALL OPENINGS FOR SHIPMENT.
14. APPROX. WT.: T.B.A. lbs
15. QTY. REQ'D.: 1

ENERGERA

PO# 23258

SO# 231054

THIS DRAWING IS THE PROPERTY OF FOURSTAR RESOURCES INC. AND IS NOT TO BE PRINTED, PHOTOGRAPHED, COPIED, LOANED OR USED WITHOUT ITS PERMISSION

						FOURSTAR RESOURCES INC. NISKU, ALBERTA, CANADA	4"CL.300RF SPOOL
						DRAWN BY: WT DATE OCT06/23 CHECKED BY: WT DATE OCT06/23	
0	ISSUED FOR CONSTRUCTION	WT	WT	OCT06/23		APPROVED BY: WT DATE OCT06/23 SCALE: NTS	
REV.	DESCRIPTION	BY	CHK'D	DATE			DRAWING NO. 231054ISO-03